

ANTIBAC AIRTUBE T8

Antimicrobial LED tubes




*LED TAILOR INNOVATION -
Photon disinfection system
First level of protection*

Replace old fluorescent tubes with bright white light that limits the growth of microbes!



Ideal for sensitive areas with a high volume of people and where microbes easily spread and reproduce.




1. Remove the old fluorescent tubes and starters and recycle them.



2. Install the ANTiBAC AiRTUBEs and the LED starters included in the package.




3. You can make full use of the space as the ANTiBAC AiRTUBE makes sure that microbes do not reproduce or spread. Flicker-free

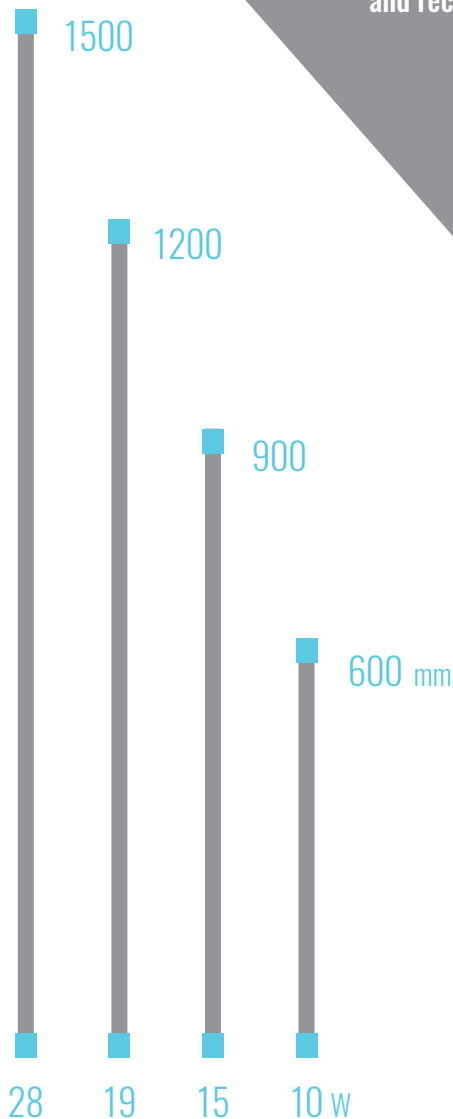

*Flicker-free
clean
white light*

For more demanding environments we recommend
Protection Level 2:

*WiSDOM AiR photon disinfection luminaire
is added to your system and it will effectively
inactivate microbes from the air and surfaces.*

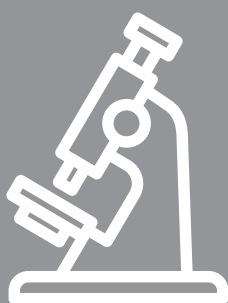

*We are constantly developing
the technology and conducting
research with our international
network.*



*Please contact us if you
wish to see more info or
if you are interested in
co-operation!*



www.ledtailor.fi

Lairolantie 11
24910 Halikko

info@ledtailor.fi



ANTiBAC AiRTUBE T8

Antimicrobial LED tubes

ANTiBAC AiRTUBE	600 mm	900 mm	1200 mm	1500 mm
Power	10 W	15 W	19 W	28 W
Weight	225 g	300 g	385 g	445 g
Energy efficiency class	A++	A++	A++	A+
Light output	1420 lm	2130 lm	2700 lm	3500 lm

Light colour	Pure white
Connection	T8 / G13
Voltage & Frequency	230 V AC, 50/60 Hz
Power Factor	0.95
THD	10%
Color Rendering Index ^(CRI)	Ra 80
Flicker Percentage	< 5%
Color Accuracy	MacAdam 3 SDCM
Valon säteilykulma	120°
Average Lifetime	125 000 hours (L70B50 / Ta 25°C)
Warranty	Unlimited 3 year warranty up to + 35 ° C
Operating Temperatures	-40°C ... +50°C
Operating Humidity	< 95%
Protection Class	IP20
Housing Material	Anodized aluminum, PC plastics (plastic materials fire resistance class UL94-V0)
Certifications	CE, RoHS



DESIGNED AND MANUFACTURED IN FINLAND

LED Boxeo

600 x 600 mm light module

IP20

4 TUBES

Available lengths: 600 mm
Installation: T-Lattice
Materials: Steel sheet
Connection: T8 / G13
Voltage&Frequency: 230V AC, 50/60 Hz



LED Teva slim

Small open light luminarie

IP20

3 TUBES

Available lengths: 1200 mm / 1500 mm
Installation: Surface mounting or hanging rail
Materials: White painted galvanized sheet steel
Connection: T8 / G13
Voltage&Frequency: 230V AC, 50/60 Hz



LED Duo

Universal splash-proof lighting fixture

IP44

2 TUBES

Available lengths: 600 mm / 1200 mm / 1500 mm
Installation: Swing or surface mounting, suspension rail
Material: White painted galvanized sheet steel / aluminum, ABS plastic finish
Connection: T8 / G13
Voltage&Frequency: 230V AC, 50/60 Hz



LED Prima plus

Dust and moisture protected industrial light fixture for demanding applications

IP66

2 TUBES

Available lengths: 600 mm / 1200 mm / 1500 mm
Installation: Surface mounting or hanging rail
Material: White painted galvanized sheet steel / aluminum, ABS plastic finish
Connection: T8 / G13
Voltage&Frequency: 230V AC, 50/60 Hz

